










Inert gas extinguishing technology

Pipe coupling

Fittings
upstream piping - 300 bar

Approvals
without approval

Designation	DN	Thread	Part no.	Weight kg (lbs)
 Cap	50	Rc 2	910952	2.1 (4.6)
	65	Rc 2.1/2	910953	3.2 (7.1)
 Reducing nipple	65 / 50	Rc 2.1/2 x 2	910947	0.7 (1.5)
 Elbow	50	Rc 2	910950	6.3 (13.9)
	65	Rc 2.1/2	910951	9.7 (21.4)
 Tee - piece	50	Rc 2	910948	8.1 (17.9)
	65	Rc 2.1/2	910949	12.4 (27.3)
 Socket	50	Rc 2	910956	2.9 (6.4)
	65	Rc 2.1/2	910957	3.8 (8.4)
 Hex. nipple	50	Rc 2	910954	1.0 (2.2)
	65	Rc 2.1/2	910955	1.8 (4.0)
 Coupling HD	50	Rc 2	886187	3.4 (7.5)
	65	Rc 2.1/2	886188	8.0 (17.6)

Technical data

Working pressure6000 psi = 413,7 bar
Coupling HD = 365 bar (5293 psi)
 Finishgalvanized
 Materialacc. to ASTM A105
Coupling HD acc. to EN 10025-2 - S355J2
 Threadacc. to ISO 7/1 - Rc, cone
 Dimensionsacc. to ANSI B16.11
 Markingmanufacture's sign, dimension,
batch number, pressure stage and material

Note

Fittings **without** pressure test; fittings with pressure test see
 Fittings "PT" upstream piping - 200 bar / 300 bar

SAP designation

e.g. part no. 910952: Cap 6000psi Rc 2"-St-ANSI B16.11

Maintenance

maintenance-free

Spare parts

O-ring coupling HD50, part no. 886412
 O-ring coupling HD65, part no. 886413

Not included in delivery

Hooked wrench for coupling HD50 ...886283, see system accessories
 Hooked wrench for coupling HD65886284, see system accessories




Inert gas extinguishing technology

Pipe coupling

Fittings upstream piping - 300 bar

Dimension drawing Dimensions in mm (inch)

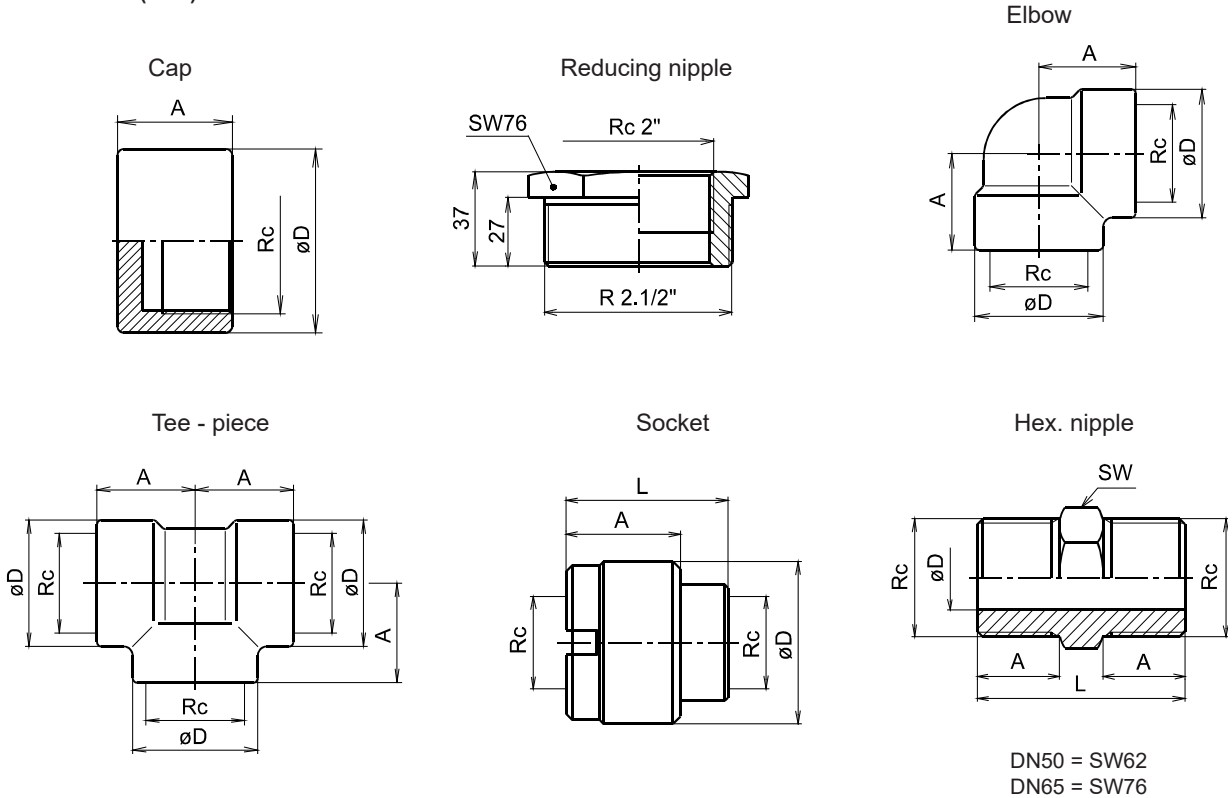

Designation	DN	Thread	A	$\varnothing d$	L
Cap	50	Rc 2	51 (2.01)	92 (3.62)	-
	65	Rc 2.1/2	64 (2.52)	108 (4.25)	-
Reducing nipple	65 / 50	Rc 2.1/2 x 2	-	-	-
Elbow	50	Rc 2	83 (3.27)	102 (4.02)	-
	65	Rc 2.1/2	95 (3.74)	121 (4.76)	-
Tee - piece	50	Rc 2	83 (3.27)	102 (4.02)	-
	65	Rc 2.1/2	95 (3.74)	121 (4.76)	-
Socket	50	Rc 2	-	92 (3.62)	86 (3.39)
	65	Rc 2.1/2	-	108 (4.25)	92 (3.62)
Hex. nipple	50	Rc 2	27 (1.06)	39 (1.54)	71 (2.80)
	65	Rc 2.1/2	37 (1.46)	51 (2.01)	94 (3.70)
Coupling HD	50	Rc 2	75 (2.95)	105 (4.13)	106 (4.17)
	65	Rc 2.1/2	85 (3.35)	140 (5.51)	129 (5.08)