



Trusted above all.



## Viking Foam Products

Quick Reference Guide | EMEA





# Introduction to Foam Products

Viking is renowned for the development, manufacturing, sales and distribution of excellent fire protection technologies and has been a dependable partner in fire protection for many decades.

The broad product portfolio encompasses innovative and proven system components for water, foam and gas extinguishing systems as well as fire detection systems and is a reflection of Viking's unwavering focus on providing customers with the finest products and highest level of support.

Through Viking's dedicated and knowledgeable customer service, installers of fixed fire protection systems have access to those quality products and can place their trust in the professional and dedicated support services provided by Viking employees. From the smallest project to the largest endeavour, Viking is their single-point partner with the goal to provide the right material whenever and wherever needed.

Viking is passionate about fire protection and committed to the growth of the fixed fire protection industry. As Viking is completely focused and dedicated to this market, customers can have confidence that Viking has the expertise that they need to be successful. They can count on Viking's resources and technical expertise to help them whenever they have a challenge to overcome. And they can be sure to find the right product or solution for their project with the necessary approval or accreditation.

This quick reference guide provides an overview of Viking's comprehensive range of foam products. Besides access to those products, customers benefit from a market leading technical support team across Europe and the Middle East, which is also holding regular technical training courses on foam systems, products and maintenance. Learn more at [www.viking-emea.com](http://www.viking-emea.com).

## Viking EMEA offers ASME certificated Bladder Tanks manufactured in Europe with U Stamp option

The ASME BPVC certification program conforms to the rules governing the design, fabrication, assembly, and inspection of boiler and pressure vessel components during construction. ASME began offering certification to companies in the pressure equipment industry to certify their quality control systems comply. Products manufactured by ASME BPVC certificate holders can be certified and stamped with the Certification Mark in accordance with the applicable ASME BPVC section.

Utilization of the Certification Mark is a means of complying with the laws and regulations in nearly all U.S. States and Canadian Provinces. In addition, it has been estimated that over 100 countries accept the ASME BPVC as a means of meeting their government safety regulations.

The quality systems of more than 7,000 companies in more than 70 countries are currently certified by ASME. Whether or not an ASME Certification Mark is legally required, it provides users with a high degree of confidence that the stamped items conform to established safety standards.

### Table of contents

Foam System Solutions	3
Typical System Operation	3
Foam Storage Tanks	4
Proportioning Devices	5
Fluorine Free Foam Concentrates	8
Discharge Devices & Nozzles	10
Monitor Equipment	13
Trailers & Cabinets	18
Foam Pumps	19
CAF Products	19
Engineered Products & Systems	19

**For all applicable approvals, please refer to the technical documentation or contact your local Viking sales office.**

"SFFF compatible" refers to this product as being part of a SFFF Foam system that has been tested to recognised standards. Not all configurations are available. Please consult technical data and/or the Approval/Listing for usage requirements.



# Foam System Solutions

A foam-water system is a special system of pipe connected to a source of foam concentrate and a water supply. The system also requires appropriate discharge devices to control and/or extinguish most Class A and Class B fires. The piping system is connected to the water supply through a control valve (wet, dry, deluge, preaction, flow control) that is actuated by the operation of automatic detection equipment that is installed in the same areas as the discharge devices.

Foam-water systems are designed to distribute a foam-water solution to a specific hazard area within a protected facility. Typical facilities are incineration plants, logistics centres, aircraft hangars and areas where flammable-liquid spill fires may occur, such as refineries.

The type and potential size of the hazard determines the number of discharge devices, type of foam concentrate, and foam-water discharge rate and duration. Characteristics of some flammable products may require higher densities and special foam liquid concentrates.

NFPA 11 and EN13565-2 contain requirements for foam-water systems, with requirements for foam systems also found in NFPA 13, NFPA 16, NFPA 30, NFPA 409, and NFPA 418.

## Why are we different?

Viking is committed to providing systems and components that can demonstrate the required level of performance in a fire scenario. This is why many of our systems and products carry FM approval (to FM5130) and/or have UL listings (to UL162). These test standards require that the components parts are tested together to form a fixed foam suppression system.


Viking is able to offer several approved system solutions that include the foam concentrate, proportioning device, storage tank and discharge device, which give test standard and code compliance, meaning peace of mind for you and your client.

Many of our products have also been tested to local approval standards and EN13565-1 – details of which can be found inside the relevant submittal or technical data page.

## Typical System Operation

### Foam Deluge System

When the detector (1) is activated by fire, a signal is sent to the Release Control Panel (2). The panel sends appropriate alarm signals and, at the same time, signals the release of the solenoid valve (3). The deluge valve priming chamber (4) is then vented faster than water is supplied through the restricted orifice (5), allowing the deluge valve to open. When the deluge valve operates, pressure opens the pressure operated relief valve (PORV) (6) continuously venting the water to the priming chamber, ensuring the deluge valve remains in the open position. Trim piping, tied into the priming chamber of the Halar-coated concentrate control valve (7), allows that valve to open at approximately the same time, opening the foam concentrate line to the sprinkler system. The outer shell of the bladder tank (8), pressurized by system water, squeezes foam concentrate out to the proportioner (9). As water flows through the venturi area of the proportioner, a metered pressure drop draws foam concentrate into the system water creating a foam solution mixed to the appropriate ratios. This solution then flows through the sprinkler piping and out to the open sprinklers or nozzles (10).

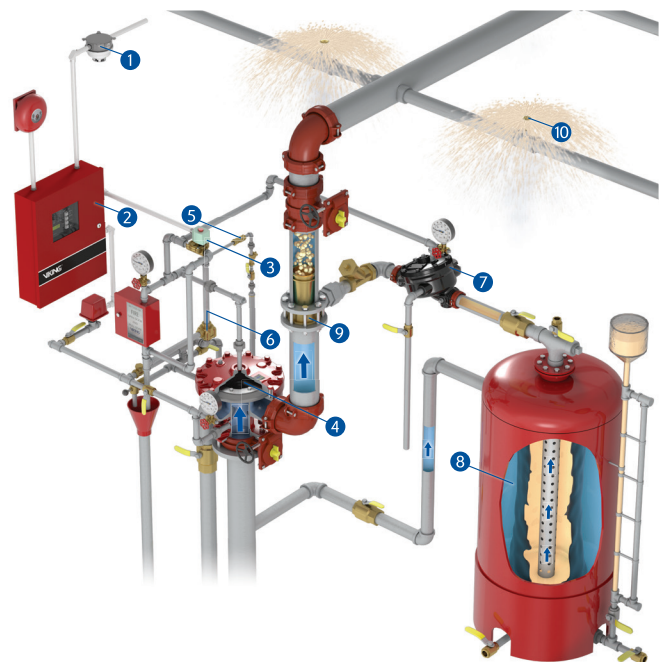



# Foam Storage Tanks

The Viking bladder tank requires no external power and is part of a balanced pressure proportioning system used to mix water and firefighting foam together to generate an effective extinguishing medium.

Bladder tanks are used extensively in the firefighting industry due to the effectiveness of the water/foam ratio remaining stable despite variable flow rates and pressure conditions that occur during system operation. This feature makes bladder tanks particularly suitable for multiple hazard systems, sprinkler systems and any other system operating under variable, non-predictable flow and pressure conditions.

Viking also has a range of atmospheric foam storage tanks of various construction types for use with foam pump and dosing systems.



## Model FT and Model VFT Vertical Foam Concentrate Bladder Tanks

- From 100 to 15,000 litre capacity
- 12 and 16 bar standard pressure ratings with approval, other pressures available on request
- Standalone or pre-assembled
- Protective coatings available
- Available approvals: FM, UL, GOST-R, CCCF and design codes: EN13445, ASME Sec VIII Div.1



## Model FT and Model VFT Horizontal Foam Concentrate Bladder Tanks

- From 200 to 20,000 litre capacity
- 12 and 16 bar standard pressure ratings with approval, other pressures available on request
- Standalone or pre-assembled
- Protective coatings available
- Available approvals: FM, UL, GOST-R, CCCF and design codes: EN13445, ASME Sec VIII Div.1



## Model FT and Model VFT Vertical Foam Concentrate Twin Bladder Tanks

- From 200 to 15,000 litre capacity
- 12 and 16 bar standard pressure ratings with approval, other pressures available on request
- Pre-assembled or skid mounted
- Protective coatings available
- Available approvals: FM, UL, GOST-R, CCCF and design codes: EN13445, ASME Sec VIII Div.1



## Model VFT Vertical Foam Concentrate Stainless Steel Bladder Tanks

- From 100 to 15,000 litre capacity
- 12 and 16 bar standard pressure ratings with approval, other pressures available on request
- Standalone or pre-assembled
- Protective coatings available (image for illustration only)
- Available approvals: FM, UL, GOST-R, CCCF and design codes: EN13445, ASME Sec VIII Div.1



## Model VFT Horizontal Foam Concentrate Stainless Steel Bladder Tanks

- From 200 to 20,000 litre capacity
- 12 and 16 bar standard pressure ratings with approval, other pressures available on request
- Standalone or pre-assembled
- Protective coatings available (image for illustration only)
- Available approvals: FM, UL, GOST-R, CCCF and design codes: EN13445, ASME Sec VIII Div.1



# Foam Storage Tanks



## 36 Gallon Bladder Tank Hose Station Tank

- Standalone hose station as required by NFPA 409
- Galvanised steel hose reel with water supply through centre of reel
- 30 metre hose with pistol grip nozzle
- Assembled with FM Approved and UL Listed components, CE compliant, design codes: EN13445, ASME Sec VIII Div.1



## Model AT Foam Concentrate Atmospheric Storage Tank

- From 200 to 15,000 litre capacity
- Available pre-assembled with eductor or skid mounted
- Carbon steel
- Protective coatings available
- Fibre glass and HDPE atmospheric storage tanks also available



## SAFE-Tank® Secondary Containment Atmospheric Tanks

- Double wall flat bottom tank manufactured of high-density cross-linked polyethylene (XLPE)
- Provides secondary containment to avoid equipment or property damage, chemical loss, or injury in the event of a spill
- Designed for above-ground, vertical installation
- From 400 to 32,930 litre capacity



## Model QS Quickseal Unit

- Self-contained pre-mix foam storage vessel
- For the protection of floating roof tanks
- Available in carbon or stainless steel
- Painted or galvanised
- Electric or pneumatic detection



## Self-Contained Premix Foam Tank

- Nitrogen pressurised premix system for use when no water supply is available
- From 400 to 20,000 litre capacity
- Different discharge pressure according to system design
- CE compliant. Design codes: EN13445 or ASME Sec VIII Div.1
- Use with specially selected premix foam solutions





# Proportioning Devices

Viking has a wide range of foam proportioning options available. Choice of product is depending on your project requirements.

Proportioning is a key part of any fixed foam system as it needs to accurately introduce foam concentrate into the water supply to produce foam solution.

Equipment should be carefully selected based upon application, flow rate, foam and system type.



## Model VNR Wide Range Bladder Tank Proportioner

- Ensures correct proportioning at low flows such as sprinkler systems
- 6" (150 mm) and 8" (200 mm)
- Range covers 189 to 11,355 l/min (see specific model)
- FM Approved



## Model WR Wide Range Bladder Tank Proportioner

- Ensures correct proportioning at low flows such as sprinkler systems
- 4" (100 mm) to 10" (250 mm)
- Range covers 75 to 16,100 l/min (see specific model)
- Available with GOST-R certificate
- CNBOP and ÉMI certified to EN13565-1



## Model RC and VRC Grooved Ratio Controller

- 2", 2.5", 3", 4", 6" and 8"
- Horizontal, vertical and pre-assembled to bladder tank installation
- Nickel aluminium bronze or brass construction
- For use with fresh or salt water
- Available with FM approval and UL listing



## Model VRC Flanged Ratio Controller

- 3", 4", 6" and 8"
- Horizontal, vertical and pre-assembled to bladder tank installation
- Nickel aluminium bronze construction
- For use with fresh or salt water
- Available with FM approval and UL listing



# Proportioning Devices



## Model VLF In-Line Balanced Proportioner

- 3", 4", 6" and 8"
- Horizontal or vertical installation
- Nickel aluminium bronze or brass construction
- For use with fresh or salt water
- Available with FM approval and UL listing




## Model PB Balanced Proportioner / PBW Balanced Wide-Range Proportioner

- 4" (100 mm) to 10" (250 mm)
- Range covers 400 to 25,000 l/min (Model PB), 75 to 16,100 l/min (Model PBW)
- Bronze or stainless steel body
- Available with GOST-R certificate



## Model SB In-Line Mixer / Eductor

- 225 to 4,500 l/min @ 4-12 bar working pressure
- Bronze
- 0% / 3% / 6% selector valve available on request



## Model BFZ Eductor

- 1.5", 2", 2.5", 3", 4", 6" and 8"
- Fixed, between-flange installation
- High backpressure
- High suction height
- Customized for system flow rates
- Compatible with various foam concentrates





# Fluorine Free Foam Concentrates

Viking offers a wide selection of foam concentrates for use with different system components and discharge devices. We can assist in selection depending on your application and design standard requirements. All foam concentrates manufactured by DAFO Fomtec AB. All foams shown here are free from intentionally added fluorinated surfactants and polymers (PFAS). All are considered 100% readily biodegradable. Additional environmental reports and assessments may be available on request. Some certificates, listings or approvals may only be available in the name of the original manufacturer.



## Viking ARK Foam Concentrate - Synthetic Fluorine Free Foam (SFFF)

- For use on class B hydrocarbon and polar solvent ignitable liquids
- FM Approved for use with non-aspirated sprinklers
- Designed specifically for fixed foam systems



## Viking USP Foam Concentrate - Synthetic Fluorine Free Foam (SFFF)

- For use on class B hydrocarbon ignitable liquids
- FM Approved and UL Listed for use with non-aspirated sprinklers
- Designed specifically for fixed foam systems
- Particularly suited to aircraft hangar applications with several different discharge device types
- IMO Misc 132, ICAO Level B, Boeing BSS 7432 (Corrosion)



## Viking XMAX 3% High Expansion Foam Concentrate

- Extensively tested for use with Viking proportioning and high expansion generator equipment
- UL listed
- Suitable for use in accordance with NFPA 409, UFC 4-211, EN13565-2
- EN1568 Part 1,2 and 3



## LS EXP Multi-Purpose High Expansion Concentrate

- Highly effective formulation giving bubble strength and slow collapse time
- Tested in large scale fire scenarios
- Certification: EN1568-2, IMO MSC/Circ.670, ISO 7203, GOST-R, CCCF
- Use with GT30, GT100, GH250, GH400, GH800 high expansion generators



## Enviro eMax 3% High Expansion Foam Concentrate

- Can be used for the protection of hydrocarbon and polar solvent ignitable liquids.
- For use with high expansion generators
- Certificated to CNPP R12/T12 and for use with Viking's VdS Approved high expansion generators.
- EN1568 Part 2,3 and 4





# Fluorine Free Foam Concentrates



## Enviro AIR

- High performance foam concentrate for Aircraft Rescue and Fire Fighting (ARFF)
- Low Viscosity
- ICAO Level B



## Enviro 3X3 Ultra

- Can be used for the protection of hydrocarbon and polar solvent ignitable liquids.
- Suitable for potable and sea water use
- EN1568 Part 3 and 4
- GESIP, HOCNF documented (marine)



## Enviro Class A Foam Concentrate

- Also known as “wild fire foam” and “wetting agent”
- Intended for use against class A fires such as wood, paper, textiles or rubber
- Class A foams are often intended for use at very low concentration of 0.1 to 1%
- Approved by United States Department of Agriculture (USDA) Forest Service and QPL (qualified products List) listed



## EnviroSenze Simulation Foam and Trainer E-Lite Training Foam Concentrate

- EnviroSenze products are environmentally friendly foam mimic concentrates with non-foaming properties. They are designed to be used when testing and commissioning foam systems.

The foam mimic concentrate has been designed to have similar flow behaviour as traditional foam concentrate but has no foaming agents inside. The foam mimic concentrate can also be used to determine induction ratio as measured by conductivity.



- Training foams are economical, environmentally friendly, fluorine free foams that mimic the properties of frontline firefighting foams. Training foams enable firefighters to train and test equipment at low cost and with minimal impact on the environment.



## Model F-2 & J-2 Foam Concentrate Control Valve

- Foam concentrate positive shut-off valve for use with bladder tanks and foam pumps
- 1.5", 2", 2.5", 3", 4" deluge or flow control version
- Grooved, threaded or flanged
- Straight through pattern (depending on size)



Please see individual technical documentation for further information such as approvals, temperature usage, suitable discharge devices, application/risk types etc.



# Discharge Devices & Nozzles

Viking has an extensive range of aspirated and non-aspirated discharge devices for use in low, medium and high expansion systems.



## Viking Foam Sprinklers

- Sprinkler applications are especially challenging for any foam due to the very low operating pressure and expansion reached. Applying foam through a sprinkler head is a very forceful application method and requires foam that can handle direct application and partial submersion into the fuel without losing its fire performance and burnback resistance. Foams that shall be regarded as suitable for sprinkler applications shall also be able to withstand a limited time of water deluge directly onto the foam blanket without losing its burnback properties.
- An extensive range of Viking sprinklers have been tested and approved to UL162, FM5130 and VdS 3896



## Model MX5 Foam/Water Sprinkler (Stainless Steel)

- Low expansion
- Up to 8:1 expansion
- 1/2"
- K-factor = 40, 57, 80 or 115
- Conventional upright/pendent
- Stainless steel



## Model MXD Foam/Water Nozzles (Stainless Steel)

- Low expansion
- Up to 8:1 expansion
- 1/2"
- K-factor = 28, 40, 57, 80 or 115
- Conventional upright/pendent or horizontal sidewall
- Stainless steel



## Model NS and ND Aspirated Foam Nozzle (Low Expansion)

- Low expansion
- 1"
- 120 l/min flow rate with 750 l/min foam production
- Stainless steel



## Model NP and NU Aspirated Foam Nozzle (Low Expansion)

- Low expansion
- 1/2"
- K-factor = 41
- Pendent or upright
- Bronze or stainless steel



# Discharge Devices & Nozzles



## Model GN Grate Nozzle

- For the protection of aircraft hangars and helipads
- 90 / 180 / 360 degree discharge pattern
- 20", 26" or 555 mm (Europe) trench width
- Use with Viking pressure regulation valves
- UL Listed and FM Approved with specific foam concentrates
- Available with Viking USP SFFF Foam Concentrate




## Helideck Nozzle

- Specifically designed for helipad protection, with bottom drain and rubber seal on the supply pipe
- Located at the deck to quickly distribute foam where spills typically occur
- 90 / 180 / 360 degree discharge pattern
- Small footprint with no moving parts saves floor space
- 2" grooved inlet for simple installation
- Designed for use with Viking pressure regulation valves
- Components are UL Listed and FM Approved with Viking foam concentrates
- Available with Viking USP SFFF Foam Concentrate




## Model VFM Foam Maker

- Low expansion
- 1.5", 2.5", 3", 4"
- 24-313, 98-855, 312-1,818, 496-2,800 l/min
- 2.1 - 8.6 bar inlet pressure range
- Painted carbon steel
- Stainless steel available



## Model VFV Foam Pourer

- Low expansion
- 3", 4", 6", 8"
- Use with model VFM foam maker
- Painted carbon steel
- Stainless steel available



## Model VFC Foam Chamber

- Low expansion
- 2.5", 3", 4", 6"
- 137-855, 312-1,818, 496-2,800, 1,372-4,774 l/min
- 2.1 - 8.6 bar inlet pressure range
- Painted carbon steel
- Stainless steel available
- Available with split deflector, solid deflector and tank mounting kit



## Model FR Rimseal Foam Maker with Pourer

- Low expansion
- For use with floating roof flammable liquid storage tanks
- 200, 400, 800, 1,500, 2,000 l/min
- Painted or galvanised carbon steel
- Stainless steel available



# Discharge Devices & Nozzles




## Model NM Medium Expansion Foam Nozzles (Basket Type)

- Medium expansion
- Up to 60:1 expansion
- K-factor = 27 or 45
- Pendent




## Model GM Medium Expansion Foam Generator - Fixed & Portable

- Medium expansion
- 100, 225, 450, 800, 2,000 l/min
- Stainless steel
- Threaded, grooved or flanged connections




## Model GT30 and GT100 High Expansion Foam Generator

- High expansion @ 450:1 to 630:1 (dependent on foam type)
- 27 or 91 l/min @ 5 bar
- Stainless steel
- CNBOP and ÉMI certified to EN13565-1



## Model VGH10000 Single & Paired High Expansion Foam Generator

- UL Listed with Viking 3% XMAX High Expansion Foam
- Aspirated type generator
- No moving parts
- High Performance
- 2 sizes for design flexibility



## Model GH250-VDS, GH400-VDS and GH800-VDS High Expansion Generators

- VdS Approved with Viking 3% XMAX and Viking 3% LS-eMax High Expansion Foam
- Various flow rates and discharge pressures
- No moving parts
- For use with outside air according to Vds 2108
- VdS Approved to EN13565-1
- Tested by CNPP to APSAD T12 with LS-xMax synthetic, Viking LS-eMax and LS-aMax alcohol resistant foam (GH400).



## Model GH250, GH400 and GH800 High Expansion Foam Generator

- High expansion @ 400:1 to 830:1 (dependent on foam type)
- 235, 355 or 710 l/min @ 4 bar
- Stainless steel body
- Carbon steel or stainless steel piping
- Brass or stainless steel nozzles
- Tested by CNPP to APSAD T12 with LS-xMax synthetic, Viking LS-eMax and LS-aMax alcohol resistant foam (GH400)
- CNBOP and ÉMI certified to EN13565-1



# Monitor Equipment

Viking offers a wide range of different monitor sizes, construction materials and operation types to suit your varying project demands. We offer manual, self-oscillating, electric and hydraulic solutions with a stainless steel or nickel aluminum bronze body as standard to ensure a longer lifespan and dependability in the field.

To compliment our monitor range we have various aspirating and non aspirating discharge devices with the ability to self induct foam concentrate as required.

Our range of ME electrical monitors can be fully customized for each project to ensure the highest level of end user flexibility.




## Model VMT, VMH and VMW Manual Monitor

- Tiller, 1-handwheel or 2-handwheel operation
- 2.5", 3" stainless steel body
- 2.5", 3" & 4" inlet flange
- 2,000, 4,000 l/min
- Painted flame red RAL3000
- UL Listed



## Model VNN and VNS Monitor Nozzle

- 2.5" & 3" BSP or NH thread
- Fixed 250, 350, 500, 750, 1,000 GPM (946, 1,325, 1,892, 2,838, 3,785 l/min)
- For use with model VMT, VMH, VMW monitors
- Anodized aluminium, nickel aluminium bronze or stainless steel
- Adjustable from jet to spray
- UL Listed



## Model VSO Oscillating Unit

- 3" stainless steel body
- 3" & 4" inlet flange
- 2,000, 4,000 l/min
- Painted flame red RAL3000
- Adjustable from 15° to 360° continuous cycle
- Oscillation range test feature
- UL Listed





## Monitor Equipment




### Model ML Lever Manually Operated Monitors

- 2.5", 3", 4" stainless steel body
- 2,000, 4,000, 8,000 l/min
- Painted flame red RAL3000 or polished stainless steel
- Available with GOST-R certificate
- CNBOP and ÉMI certified to EN13565-1



### Model MH Handwheel Manually Operated Monitors

- 3", 4" stainless steel body
- 4,000, 8,000 l/min
- Painted flame red RAL3000 or polished stainless steel
- Available with GOST-R certificate
- CNBOP and ÉMI certified to EN13565-1



### Model MA Oscillating Unit

- 3", 4" stainless steel body
- 2,000, 4,000, 8,000 l/min
- Adjustable from 15° to 360° continuous cycle
- Available with GOST-R certificate
- CNBOP and ÉMI certified to EN13565-1



### Model MLA Lever Operated Oscillating Monitors

- 2.5", 3", 4" stainless steel body
- 2,000, 4,000, 8,000 l/min
- Adjustable from 15° to 360° continuous cycle
- Available with GOST-R certificate
- CNBOP and ÉMI certified to EN13565-1



### Model MHA Handwheel Operated Oscillating Monitors

- 3", 4" stainless steel body
- 4,000, 8,000 l/min
- Adjustable from 15° to 360° continuous cycle
- Available with GOST-R certificate
- CNBOP and ÉMI certified to EN13565-1



### Model ML Lever Manually Operated Nickel Aluminium Bronze Monitors

- Suitable for a wide range of aggressive environments
- 3" nickel aluminium bronze body
- 4,000 l/min
- Natural bronze finish or painted flame red RAL30000
- Also available in handwheel version
- CNBOP and ÉMI certified to EN13565-1



# Monitor Equipment



## Model MP Lever Operated Portable Monitor

- 2.5" stainless steel body
- 2,500 l/min
- Available with self aspirating nozzle
- Available with GOST-R certificate
- ÉMI certified to EN13565-1



## Model EKM Electrically Operated Remote Controlled Monitors

- 3", 4" stainless steel body
- 4,000, 8,000 l/min
- ATEX version available
- Robust construction, durable mechanics
- CNBOP and ÉMI certified to EN13565-1



## Model ECP Control Panel for Electric Monitors

- ATEX version available
- Automated functions with complex pattern movement
- Advanced functions with intuitive touch screen display interface
- For control of up to 6 monitors



## Model MD Hydraulically Operated Remote Controlled Monitors

- 3", 4" stainless steel body
- 4,000, 8,000 l/min
- Available with hydraulic power pack
- ATEX version available
- ÉMI certified to EN13565-1



## Model MN Foam/Water Adjustable Monitor Nozzle

- 2.5", 3", 4" BSP thread
- 3,000, 4,000, 8,000 l/min
- For use with model ML, MH, MLA, MHA, MP, EKM monitors
- Anodized aluminium, nickel aluminium bronze or stainless steel
- Adjustable from jet to spray
- CNBOP and ÉMI certified to EN13565-1



## Model MNA Self-Inducting Foam/Water Adjustable Monitor Nozzle

- 2.5", 3", 4" BSP thread
- 3,000, 4,000, 8,000 l/min
- For use with model ML, MH, MLA, MHA, MP, EKM monitors
- Anodized aluminium, nickel aluminium bronze or stainless steel
- Adjustable from jet to spray
- CNBOP and ÉMI certified to EN13565-1





## Monitor Equipment



### Model MEN Electrically Operated, Remote Controlled Foam/Water Monitor Nozzle

- 2.5", 3", 4" BSP thread
- 3,000, 4,000, 8,000 l/min
- Full control of spray pattern from jet to fog
- For use with model EKM electric monitor
- ATEX version available
- CNBOP and ÉMI certified to EN13565-1 (as part of EKM electric monitor)



### Model WRC Wireless Remote Controller for EKM Monitors

- Duplicate ECP panel feature
- Control up to 4 monitors
- ATEX version available




### Model MDN Hydraulically Operated Remote Controlled Foam/Water Monitor Nozzle

- 2.5", 3", 4" BSP thread
- 3,000, 4,000, 8,000 l/min
- For use with model MD hydraulic monitor
- Adjustable from jet to spray
- ÉMI certified to EN13565-1



### Model BF Foam Branch Pipe

- Up to 6:1 expansion
- For use with model MD, ML, MH, MLA, MHA, MP, EKM monitors
- Stainless steel body
- Anodized alloy nozzle
- CNBOP and ÉMI certified to EN13565-1



### Model BFA Self Inducting Foam Branch Pipe

- Up to 6:1 expansion
- For use with model MD, ML, MH, MLA, MHA, MP, EKM monitors
- Stainless steel body
- Anodized alloy nozzle





# Monitor Equipment

## Model BW Water Branch Pipe



- 2.5", 3", 4" BSP thread
- 1,000 to 8,000 l/min
- For use with model MD, ML, MH, MLA, MHA, MP, EKM monitors
- Stainless steel body
- Anodized alloy nozzle



## Models MPR Fixed & MPG Rotating Platform Monitor Towers

- Various heights
- Fabricated to EN14122
- For use with model MD, ML, MH, MLA, MHA, EKM monitors
- Bespoke features available



## Trailers & Cabinets

Our range of monitor trailers can be fully customized to suit your specific site requirements. They are suitable for use with our fixed or self-oscillating monitor units and will self induce foam concentrate from the on board storage tank. Standard units are available with single or twin axles.

### Model MT Self Inducing Monitor Trailer



- 200 litre storage capacity
- Up to 3,000 l/min
- Carbon steel
- Flame red RAL3000



### Model MT-2R Monitor Trailer with Foam Storage Tank (2 Wheels)



- 1,000 litre storage capacity
- Up to 4,000 l/min
- Carbon steel or stainless steel tank
- Flame red RAL3000



### Model MT-4R Monitor Trailer with Foam Storage Tank (4 Wheels)



- 2,000 or 2,500 litre storage capacity
- Up to 6,000 l/min
- Carbon steel or stainless steel tank
- Flame red RAL3000



Our Wall Foam Unit (CF) is particularly suited to small fixed systems such as garage paint shops and/or can be utilized for mobile hose fire fighting. The 25 or 50 litre bladder tank ensures accurate foam induction without having to completely unwind the hose. The accessories, proportioning system and foam storage tank are housed in an aesthetically pleasing cabinet for wall or floor mounting.



### Model CF Wall or Self-Standing Foam Cabinet

- 25 litre bladder tank & 1% mixer
- 90-110 l/min
- Use with fixed and/or mobile discharge devices
- Accurate proportioning and foam induction even if hose is not fully unwound

### Model BP Portable Foam Branchpipe / BPA Self Inducing Branchpipe




- Low expansion
- 225, 450, 800 l/min
- Stainless steel
- Pick-up tube and regulator (BPA)



# Foam Pumps

## FoamPak Integrated Foam Pumping Assembly



- Preassembled skid with UL Listed and FM Approved components
- Foam concentrate pump(s) flow range: 25 - 420 US gpm
- Pump controllers: 220/230 V, 380/415 V, 460/480 V – 50Hz or 60Hz
- Pressure range: 6.9 bar (100 psi) to 18 bar (261 psi)
- Single electric, double electric or electric diesel configurations
- Carbon steel frame with stainless steel pipework, painted flame red RAL3000

# CAF Products

## ICAF - Integrated Compressed Air Foam System



- Significant reduction in foam and water requirements
- Reduced infrastructure and drainage requirements
- Enhanced system performance
- Improved visibility in the hazard
- Engineered system
- FM Approved



# Engineered Products and Systems

## Model BWCon 1.400 IBC Containment Unit



- Prevents the spread of ignitable liquids during an IBC fire situation
- Up to 1,000 litre IBC's
- Stainless Steel construction
- 1,400 litre containment sump for IBC contents and sprinkler system discharge
- Flame barrier to prevent containment sump fire
- Easy access door for the loading and unloading of IBC
- FM Approved



## Europe, Middle East & Africa

### BENELUX

**Viking SupplyNet bv**  
Eekboerstraat 28b-3  
NL-7575 AX Oldenzaal  
Netherlands  
Tel.: +31 (0)541 573233  
vikingnetherlands@viking-emea.com

### CENTRAL & EASTERN EUROPE

**Viking GmbH**  
Industriestr. 10/12  
D-23840 Bad Oldesloe  
Germany  
Tel.: +49 (0)4531 803 8087  
vikinggermany@viking-emea.com

### FRANCE

**Sprinkler Viking France S.à r.l.**  
Centre d'Affaires CESCO  
4, rue Marconi  
BP 25180  
F-57075 Metz Cedex 03  
France  
Tel.: +33 (0)800 10 29 23  
vikingfrance@viking-emea.com

### IBÉRICA

**Viking Sprinkler S.A.**  
Calle Picos de Europa 4A  
San Fernando de Henares  
E-28830 Madrid  
Spain  
Tel.: +34 91 677 8352  
vikingiberica@viking-emea.com

### ITALY

**Viking Italia S.r.l.**  
Via Livinallongo, 3  
I-20139 Milan (MI)  
Italy  
Tel.: +39 (0)2 3055 0778  
vikingitaly@viking-emea.com

### MIDDLE EAST

**Viking Arabia FZE**  
LOB 19 Office #2007  
Post Box No. 17531  
Jebel Ali Free Zone, Dubai  
United Arab Emirates  
Tel.: +971 (0)4 8895 561  
vikingdubai@viking-emea.com

### NORDIC

**Viking Nordic AB**  
Staffans Väg 5  
S-192 78 Sollentuna  
Sweden  
Tel.: +46 (0)8 594 415 90  
vikingsweden@viking-emea.com

### POLAND

**Viking SupplyNet Sp. z o.o.**  
ul. Żelazna 59  
PL-00 848 Warsaw  
Poland  
Tel.: +48 22 103 30 54  
vikingpoland@viking-emea.com

### ROMANIA & BULGARIA

**Viking Romania S.r.l.**  
Strada Vulturilor 18-18A, cam 3  
The LOBBY  
RO-030855 Bucharest  
Romania  
Tel.: +40 21 311 51 48  
vikingromania@viking-emea.com

### TURKEY

**Viking Turkey Yangın Korunum Sistemleri Ticaret A.Ş.**  
Sahrayıcedit Mah. Halk Sokak  
Golden Plaza C Blok No:29, Kat:4, Daire:8  
Sahrayı Cedit, Kadıköy - 34734 İstanbul  
Turkey  
Tel.: +90 (0)216 403 18 00  
vikingturkey@viking-emea.com

### UK & IRELAND

**Viking SupplyNet Ltd.**  
Unit 2 - Byram House, Newborn Court  
Chapel Street  
Epworth DN9 1HQ  
United Kingdom  
Tel.: +44 (0)1427 871 000  
vikinguk@viking-emea.com

For further information,  
please visit  
[www.viking-emea.com](http://www.viking-emea.com)



For further information, please contact your local Viking sales office or refer to the technical documentation.  
The contents of this publication are subject to modifications without notice.

Photo  
Cover: Fotolia/Adobe Stock © Casa da Photo; Viking

Trusted above all.

Viking S.A. | 21, Z.I. Haneboesch, L-4562 Differdange / Nieder Korn, Luxembourg | Tel.: +352 58 37 37 - 1, vikinglux@viking-emea.com

